


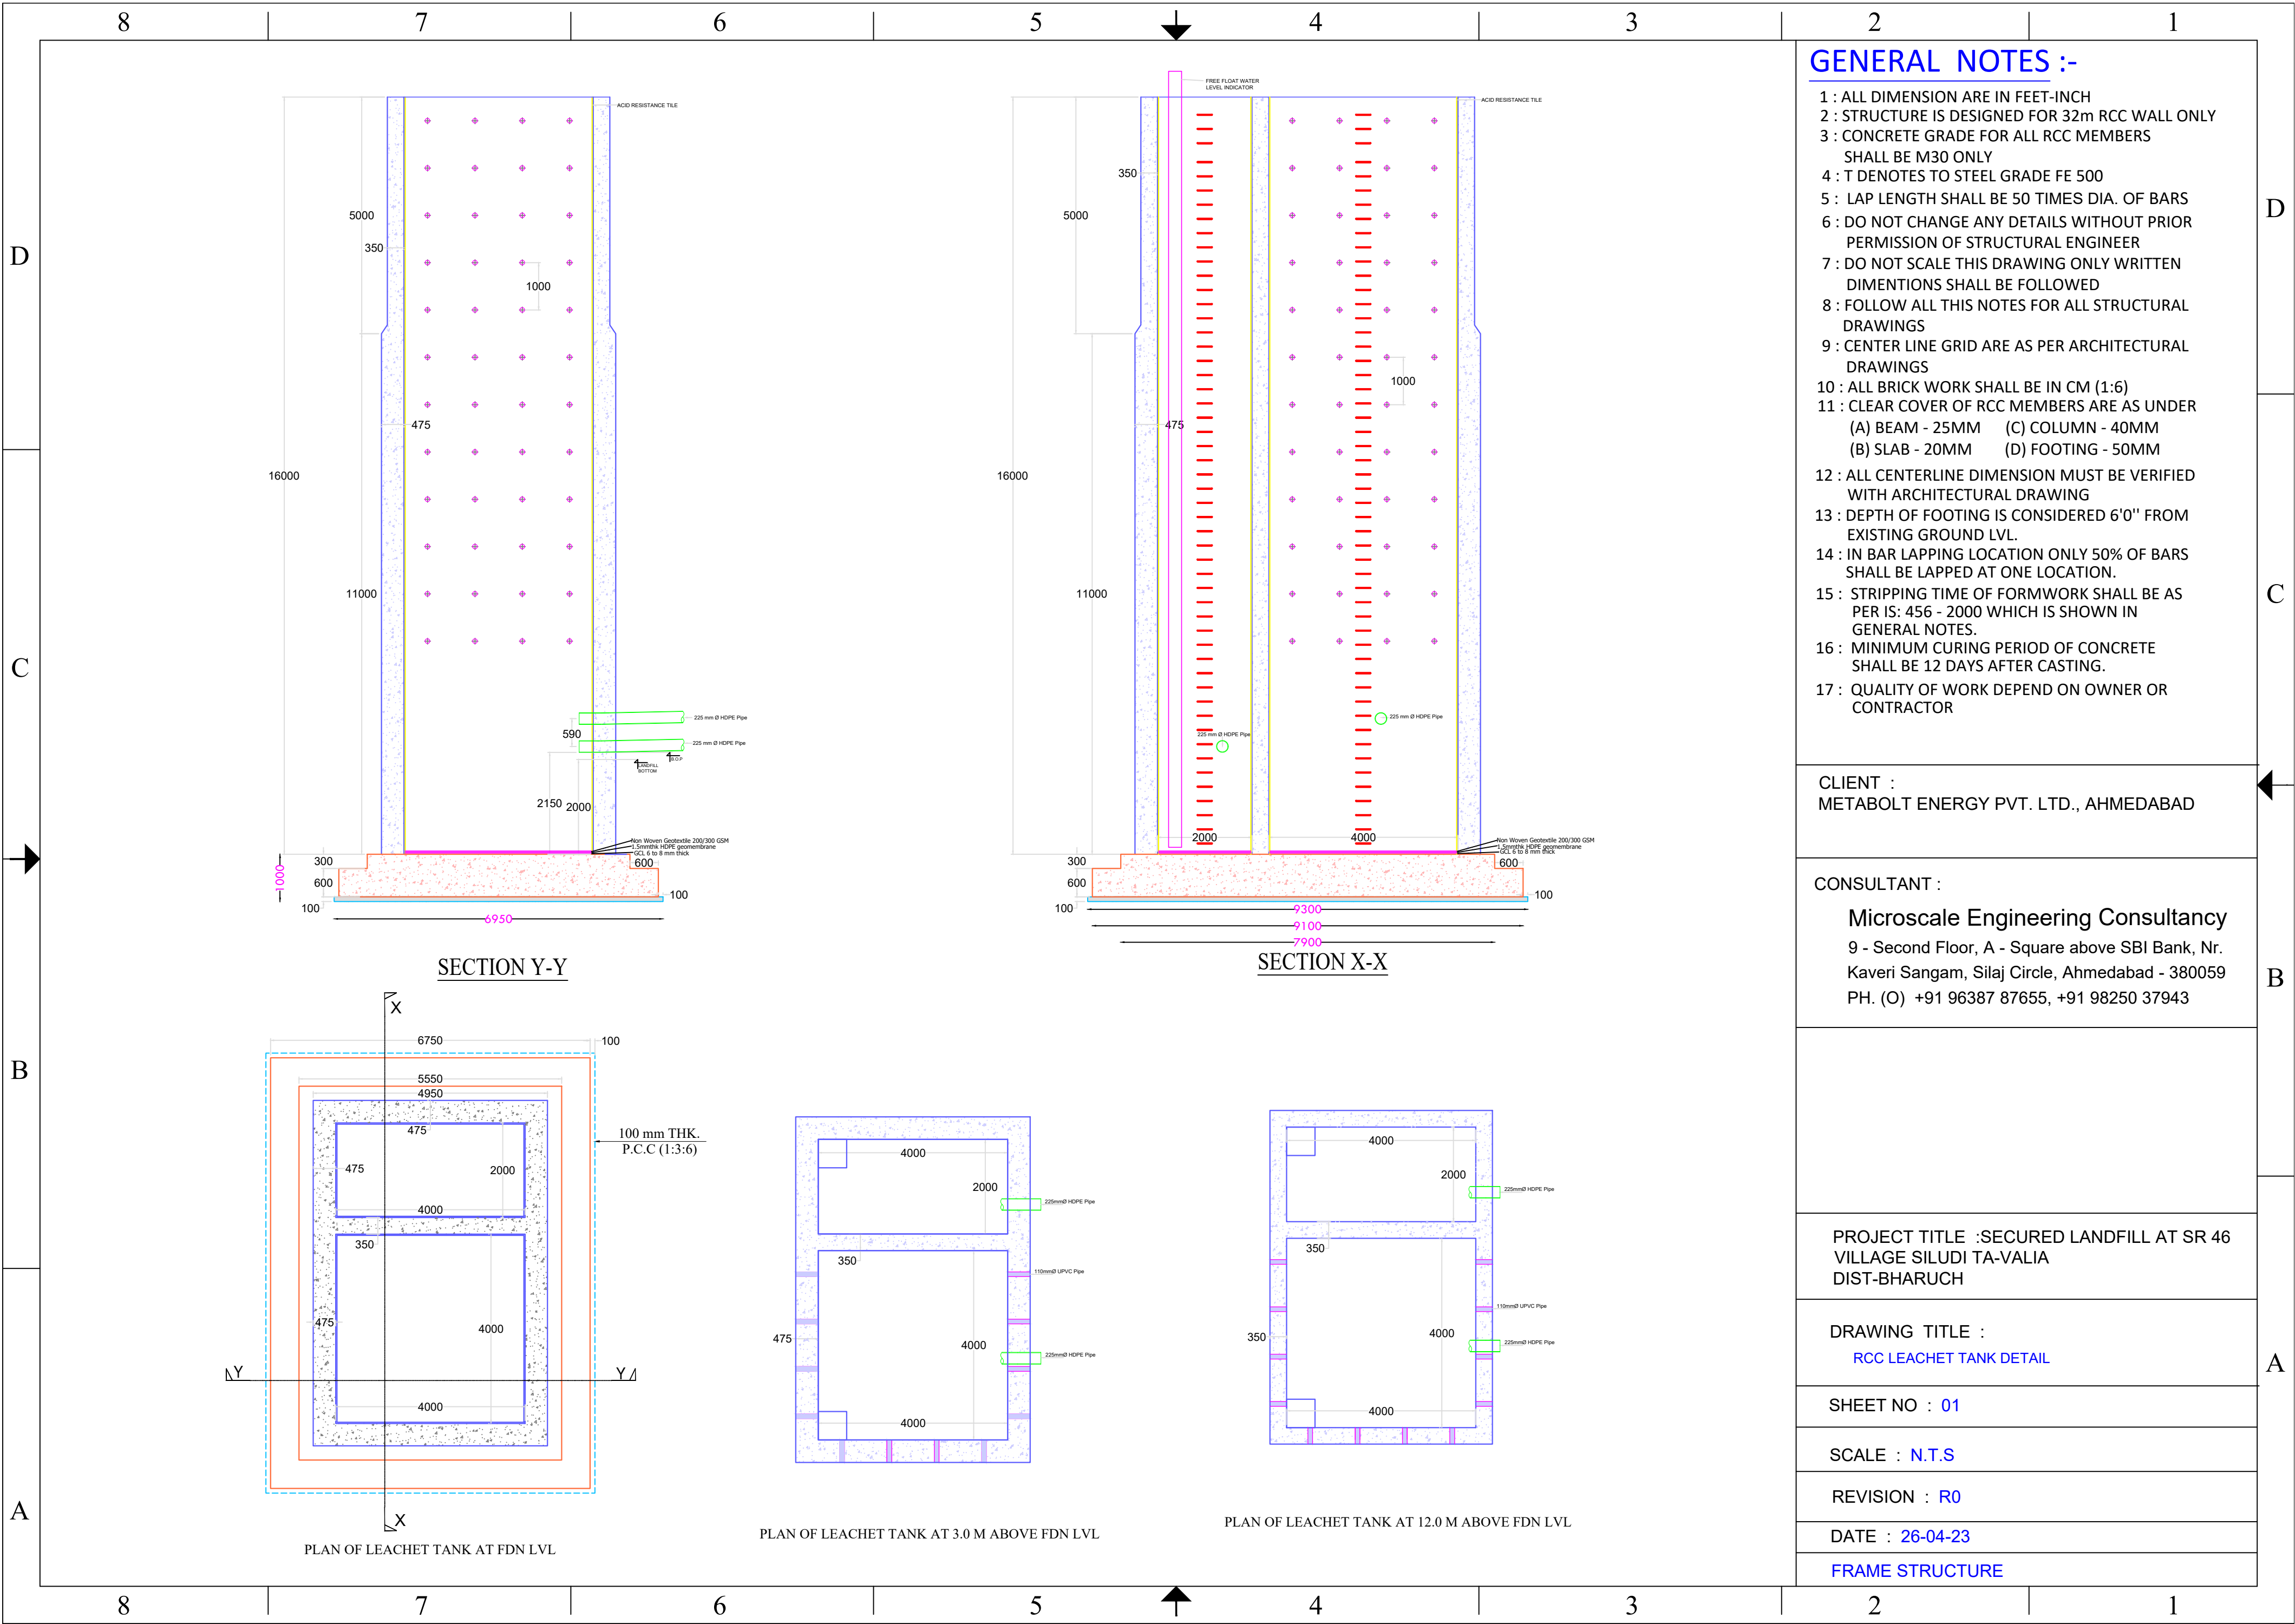

GENERAL NOTES :-

- 1 : ALL DIMENSION ARE IN FEET-INCH
- 2 : STRUCTURE IS DESIGNED FOR 32m RCC WALL ONLY
- 3 : CONCRETE GRADE FOR ALL RCC MEMBERS SHALL BE M30 ONLY
- 4 : T DENOTES TO STEEL GRADE FE 500
- 5 : LAP LENGTH SHALL BE 50 TIMES DIA. OF BARS
- 6 : DO NOT CHANGE ANY DETAILS WITHOUT PRIOR PERMISSION OF STRUCTURAL ENGINEER
- 7 : DO NOT SCALE THIS DRAWING ONLY WRITTEN DIMINTIONS SHALL BE FOLLOWED
- 8 : FOLLOW ALL THIS NOTES FOR ALL STRUCTURAL DRAWINGS
- 9 : CENTER LINE GRID ARE AS PER ARCHITECTURAL DRAWINGS
- 10 : ALL BRICK WORK SHALL BE IN CM (1:6)
- 11 : CLEAR COVER OF RCC MEMBERS ARE AS UNDER
(A) BEAM - 25MM (C) COLUMN - 40MM
(B) SLAB - 20MM (D) FOOTING - 50MM
- 12 : ALL CENTERLINE DIMENSION MUST BE VERIFIED WITH ARCHITECTURAL DRAWING
- 13 : DEPTH OF FOOTING IS CONSIDERED 6'0" FROM EXISTING GROUND LVL.
- 14 : IN BAR LAPPING LOCATION ONLY 50% OF BARS SHALL BE LAPPED AT ONE LOCATION.
- 15 : STRIPPING TIME OF FORMWORK SHALL BE AS PER IS: 456 - 2000 WHICH IS SHOWN IN GENERAL NOTES.
- 16 : MINIMUM CURING PERIOD OF CONCRETE SHALL BE 12 DAYS AFTER CASTING.
- 17 : QUALITY OF WORK DEPEND ON OWNER OR CONTRACTOR

CLIENT :
METABOLT ENERGY PVT. LTD., AHMEDABAD

CONSULTANT :
Microscale Engineering Consultancy
9 - Second Floor, A - Square above SBI Bank, Nr.
Kaveri Sangam, Silaj Circle, Ahmedabad - 380059
PH. (O) +91 96387 87655, +91 98250 37943

PROJECT TITLE : SECURED LANDFILL AT SR 46
VILLAGE SILUDI TA-VALIA
DIST-BHARUCH

DRAWING TITLE :
RCC LEACHET TANK DETAIL

SHEET NO : 01

SCALE : N.T.S

REVISION : R0

DATE : 26-04-23

FRAME STRUCTURE